



Air extractor

Olfactory purification of the booth

AIR EXTRACTOR

Sensory-proofing system

DESCRIPTION

Evacuation and air extraction vents regulated by a controlled mechanical ventilation extractor system for the olfactory purification of the booth, and to control humidity and temperature levels.

TECHNICAL CHARACTERISTICS


- Power supply: 230 V ~ 50/60 Hz single-phase
- Average electricity consumption: < 35 W
- Total weight: 9 kg (1 Air extractor + 4 flexible sheaths diameter 80mm + 1 flexible sheath diameter 125 mm)
- Air purification rate: 30 m³ per hour
- With 1 Air extraction system: connection possible from 1 to 4 cabins placed nearby (if you wish to use single booths, it is necessary to buy one Air extractor per booth)



Air extraction system installation

AIR EXTRACTOR

Sensory-proofing system

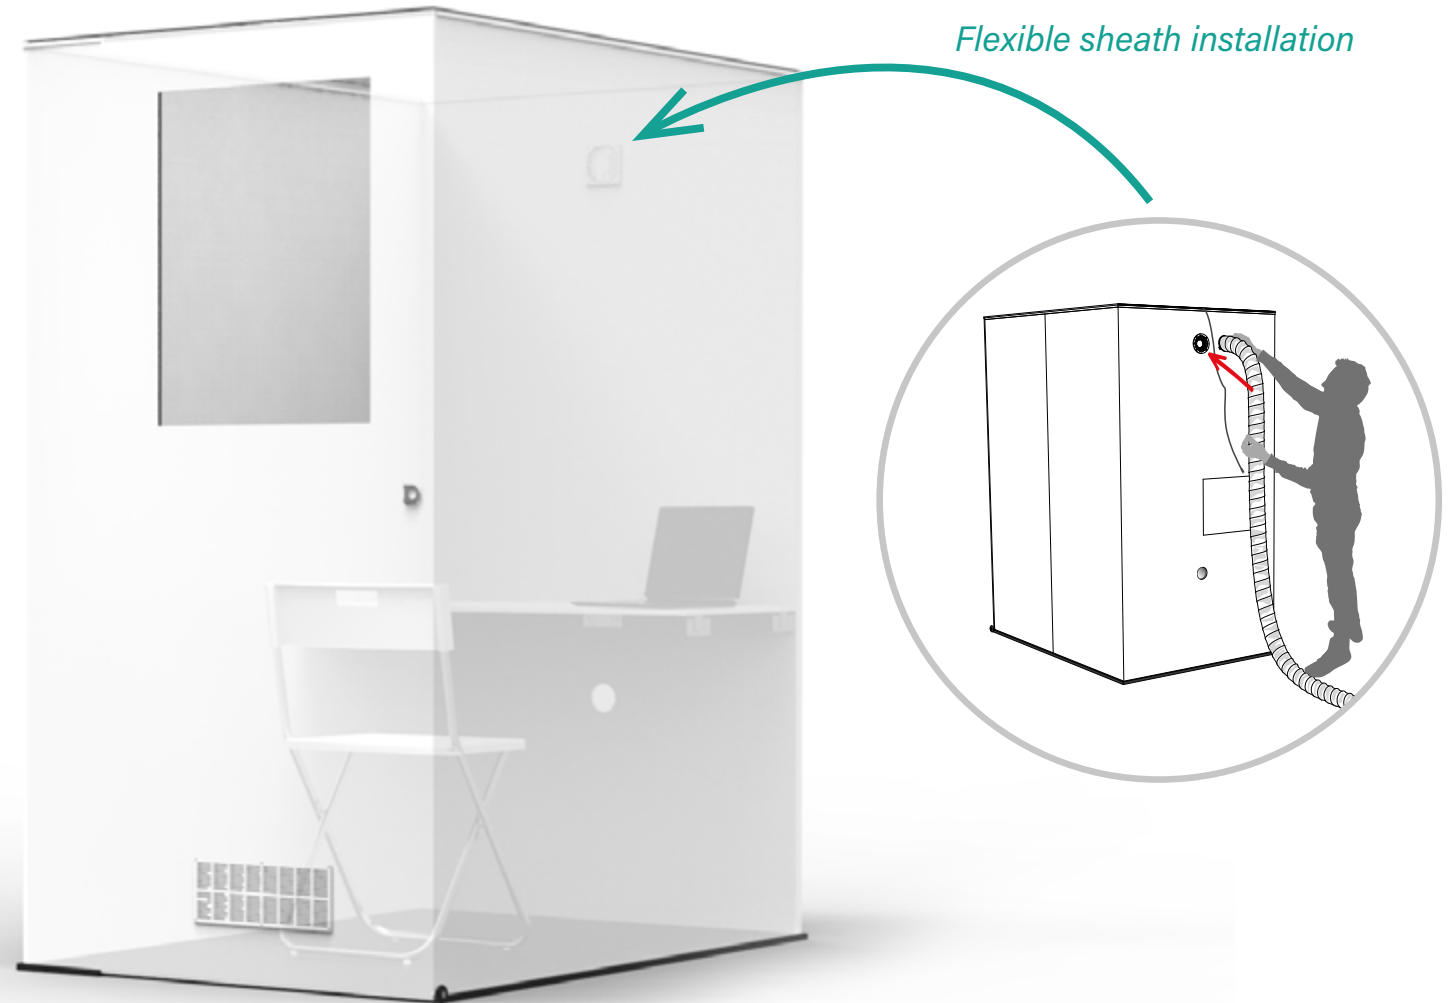



More information on our website!
thelabinthebag.com

